


# SeceuroGlide Technical



How to measure for your garage door.

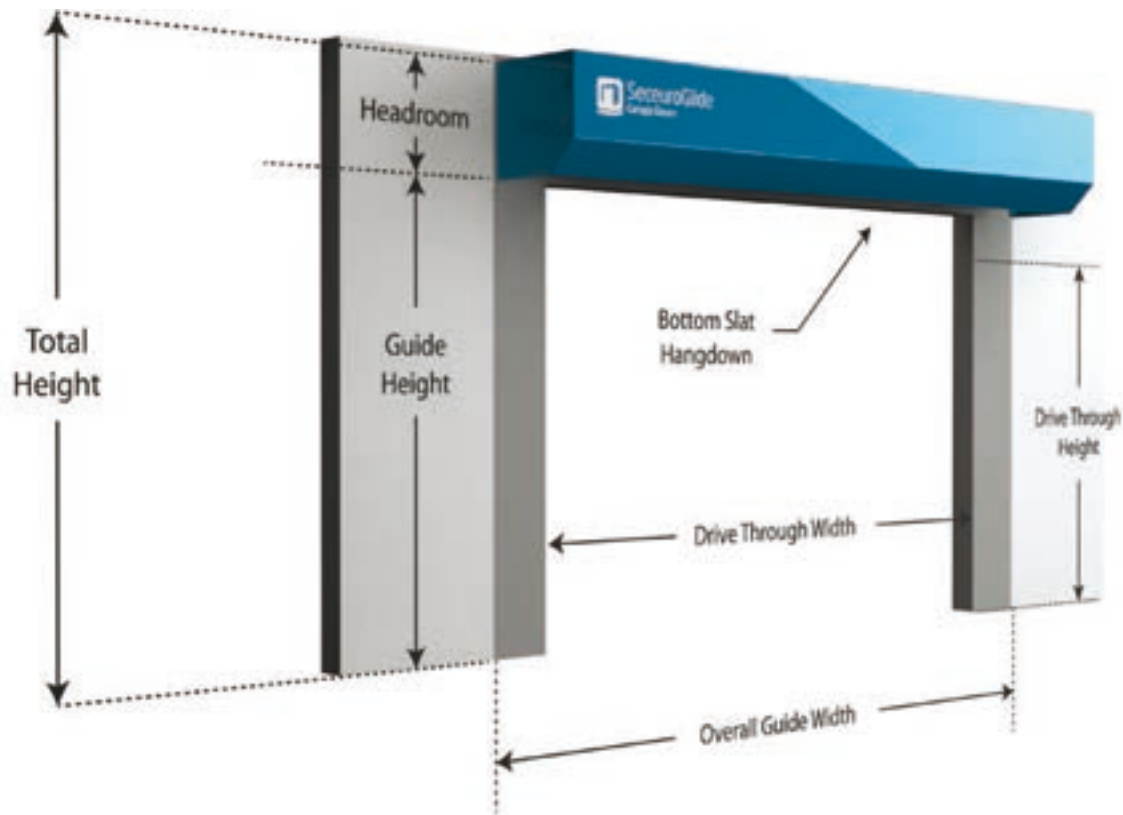

## Fitting Requirements

### Headroom requirements

- SeceuroGlide and SeceuroGlide Excel require a minimum of 300 mm headroom for doors up to 2500 mm in opening height and 350 mm headroom for door up to 3500 mm opening height
- SeceuroGlide Manual requires a minimum headroom of 300 mm
- SeceuroGlide Compact requires just 205 mm headroom for doors with an opening height up to 2150 mm

### External doors

In applications where the door is installed externally the remote control system must be installed either inside the garage or in a waterproof box (not included).

The bottom slat transmitter must always be installed on the internal face of the door and is not suitable for applications where it will be exposed to weather or excessive moisture due to condensation.

### SeceuroGlide Excel restrictions

SeceuroGlide Excel is not available as supply only as it must be installed by a trained installer. SeceuroGlide Excel can not be installed externally. The door must be installed so that the entire coil is above the opening.

The low level external override option is not available for SeceuroGlide Excel. In cases where the garage door is the only means of entry to the garage a battery backup will be required. All SeceuroGlide Excel doors are supplied with 90 mm guide rails as standard.

### Extreme weather conditions

High winds and high temperatures on double doors can cause increased deflection of the door. It is the installer's responsibility to ensure that the door is spaced off the wall sufficiently to allow for door movement during these extreme weather conditions.

# SeceuroGlide Product Comparison and Options



**SeceuroGlide**  
Roller Garage Doors

	SeceuroGlide Roller	SeceuroGlide Excel	SeceuroGlide Compact	SeceuroGlide Manual	SeceuroGlide LT
LPS 1175 / Secured by Design Accreditation		●			
CE marked	●	●	●	●	●
Construction Products Directive/ Machinery Directive compliant	●	●	●	●	●
Headroom required	300 mm/350 mm	300 mm/350 mm	205 mm	300 mm	300 mm
Max. over guide width	5400 mm	5200 mm	3000 mm	3000 mm	4800 mm
Max. opening height	3500 mm	3500 mm	2150 mm		2500 mm
Guide rails	Up to 4600 mm = 75 mm guides Over 4600 mm = 90 mm guides	90 mm	60 mm	75 mm	75 mm
Slat height	78.5 mm	78.5 mm	55 mm	78.5 mm	78.5 mm
Comb locking mechanism	●	●			
Autolock locking system			●		●
Internal installation	●	●	●	●	●
External installation	★		★		★
Webbed curtain	●	●		●	
Endlocked curtain			●		●
Half box (90 fascia)	★	★	●		★
Full box (45 fascia)	★	★	★		★
SeceuroSmart receiver with courtesy light and Safety Edge	●	●	●		●
Vacation security mode	●	●	●		
Internal manual override	●	●	●		●
External manual override	★		★		★
Vision slats	★				
Battery backup	★	★	★		★
Remote control keypad	★		★		
Key switch operation	★		★		★
Safety photo cell	★	★	★		★
90 db alarm	★	★	★		

● Standard

★ Optional

## Peace-of-Mind Warranties

All SeceuroGlide products are guaranteed against defect of material or workmanship by SWS UK, subject to correct installation, maintenance and operation, for a period of 2 years from the date of purchase.

In addition, Rosewood, Mahogany and Golden Oak Textured Woodgrain finishes carry a limited 10 year guarantee.

The Somfy Motor carries a 5 year guarantee.