

Side Hinged Doors. GSW 40-L.



car**Teck**[®]

Garage Doors and Side Doors

In a wide range of designs - numerous finishes,
surfaces, colours and glazing elements



Side Hinged Doors GSW 40-L



Superior quality

Teckentrup side hinged and personnel doors are quite simply the very best. The solid panels, engineered frames and high grade fittings result in a door that closes with a reassuringly deep "clunk".

Security is excellent and the range of styles, finishes and windows allows personalisation to suit your tastes. 1/2 and 1/2 opening and asymmetric configurations further increase versatility.



Solid 40mm thick panels

Doors are built with 40mm thick interlocking panels that reduce sound transmission and provide excellent strength.

The mitred door leaf frame and door frame are finished in a matching smooth finish for white, Trend and RAL coloured doors and a complimentary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Dark Oak (RAL8014) and Winchester (RAL8001) wood grain effect finishes. The door frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different.

Neat inside too

The inside of the door is very presentable. There are no unsightly bracings just a wipe clean surface finished in a practical grey white stucco texture (RAL 9002).



You imagine it,
We make it!

Panels, windows
and finishes
combine to
create almost
unlimited choice



Georgian Asymmetric Horizontal - Woodgrain Golden Oak



Georgian Vertical - Woodgrain Rosewood



Centre-Ribbed



Standard-Rib Vertical - Woodgrain White



Centre-Ribbed Vertical - Woodgrain White



Solid Vertical - Woodgrain White



Solid Vertical



Every detail, perfect



High quality hinges

Aluminium hinges with secured hinge bolts make it extremely difficult to lever open the door and are easily adjusted. 2 or 3 hinges are fitted to each leaf dependent on size.

Double weather strips & mitred corners

In addition to the circumferential weather strip around the door leaf, the door frame has a three-sided weather strip for excellent draught reduction. Profiles are mitre jointed for a neat finish.

Finished in style Each profile is available in a selection of finishes as shown.

Georgian Profile

Woodgrain	Woodgrain
White	Golden Oak
Trend	Rosewood
RAL	Winchester
	Dark Oak

Standard Ribbed Profile

Woodgrain	Smooth*	Smooth	Stucco	Micro Profile
White	Golden Oak	White	White	White
Trend	Rosewood	Trend	Trend	Trend
RAL		RAL	RAL	RAL

Centre Ribbed Profile

Woodgrain	Smooth	Smooth
White	Golden Oak	White
Trend	Rosewood	Trend
RAL	Winchester	RAL
	Dark Oak	



bed Vertical - Woodgrain Moss Green



Solid Horizontal with Porthole Windows - Smooth

Unlimited combinations, well almost!

There are literally hundreds of possible combinations of texture and finish making it easy to adapt the door to suit your home. Each profile is available in the textures shown above plus all Trend colours and almost all RAL colours.

Doors are supplied as standard in traffic white embossed wood grain on the outside (similar to RAL 9016) and grey white embossed stucco on the inside (RAL 9002).

Golden Oak, Rosewood and Dark Oak are wood effect laminates that match well with UPVC doors and windows. Trend colours are a selection of popular colours, however almost all RAL colours are available as an option - just ask.



al - Woodgrain White



Standard-Rib Horizontal - Woodgrain White



Centre-Ribbed Horizontal - Woodgrain White



Solid Horizontal - Woodgrain

Guarantee All doors have a 2 year guarantee against mechanical defects and a 10 year guarantee against perforation of the door panel. Terms and conditions apply, visit www.teckentrupdepot.co.uk for details



Every aspect of the door is designed and built to exacting standards.



Standard Threshold
The aluminium profile supplied as standard provides a simple low profile threshold.

Door stays
Protecting your door from slam closure on windy days, these top grade, spring dampened stays hold the door securely in the open position. A simple de-latch motion releases the held door leaf. Any leaf below 780mm wide (including asymmetric side hinged doors) will not have a stay.

Lipped Threshold
For an improved weather protection a stepped aluminium threshold with a bulb weather strip is available as an optional extra. The door leaves close against the raised weather strip creating an improved barrier to dust and debris. The threshold includes a thermal break reducing heat transfer.

Flush bolt security
The inactive leaf is secured with flush bolts to the top and bottom of the leaf. The picture also shows the rot proof floor weather strip .

Stainless steel handles & Security Locking
High grade stainless steel handles and lock covers are tough and attractive, whilst the latch and dead bolt combination provides dependable security. If you have a specific hardware requirement, talk to us as alternative designs can often be accommodated.

Triple Point Locking Option
The active leaf is available with three point locking for greatly enhanced security. The hook locks link the active and inactive door leaves together to combat attempts to force them apart.

RAL Colours

Stucco Micro Profile Woodgrain Smooth Stucco Micro Profile

White Trend RAL White Trend RAL

Solid Profile

Trend Colours

Flame Red RAL 3000	Fir Green RAL 6009	Moss Green RAL 6005	TT 703 A special satin metallic effect - grey with micaceous iron ore particles.	
Sepia Brown RAL 8014	Window Grey RAL 7040	Anthracite Grey RAL 7016		TT 8014 A special satin metallic effect - sepia brown with micaceous iron ore particles.
White Aluminium RAL 9006	Cream RAL 9001	Quartz Grey RAL 7039		
Light Grey RAL 7035	Grey Aluminium RAL 9007	Jet Black RAL 9005		TT 9011 A special satin metallic effect - graphite grey with micaceous iron ore particles.

Please Note: Where doors are exposed to direct sunlight dark colours should be avoided. Colours will be similar to the RAL references stated

Trend or RAL?

Trend colours are selected shades that have generally come to be considered as the most popular colours for garage doors. The colours are held as coated steel from which door panels are made to order.

If the colour you require is not available as a Trend colour, we are able to coat our standard panels to a RAL colour. For doors coloured in this way, doors are made and cut to size from white panels and then sprayed to the required colour.

Make the most of light

Scratch-resistant, 16mm double glazed, easy-clean windows in attractive designs allow natural light into your garage.

Each style is available with clear, frosted or opaque glazing. The window units are fitted with a polyurethane frame that is coloured to match or compliment the panel colour of the door.



**Available on standard ribbed, Centre ribbed and solid profile doors only.

*Available on Solid profile doors only. Round is shown in stainless steel and is also available in polycarbonate.



White Solid Horizontal - Smooth TT 703 Medium Ribbed Horizontal - Smooth White Medium Ribbed Horizontal - Woodgrain Moss Green

Installation Dimensions Side Hinged Doors

The section height and the height of the handle 'x' depend on the actual door height and construction of the door.


Performance features EN 13241-1 for Declaration of Performance see <http://www.teckentrupdepot.co.uk/downloads/pdf/Side%20Hinged-DOP.pdf>

Heat Insulation (DIN EN ISO 12428)	NPD
Air permeability (DIN EN 12426)	NPD
Resistance to wind load (DIN EN 12424)	NPD
Resistance to water penetration (DIN EN 12425)	NPD
Fire behaviour (DIN EN 4102)	NPD




Note: The data is provided as a guide only as variances will occur with panel design,


Installation behind the soffit, only inward opening

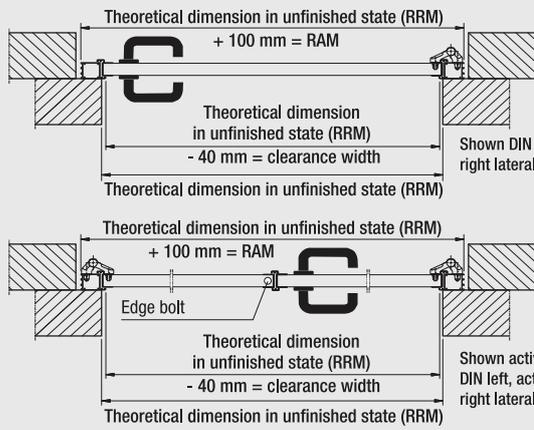


Installation within the soffit, inward or outward opening

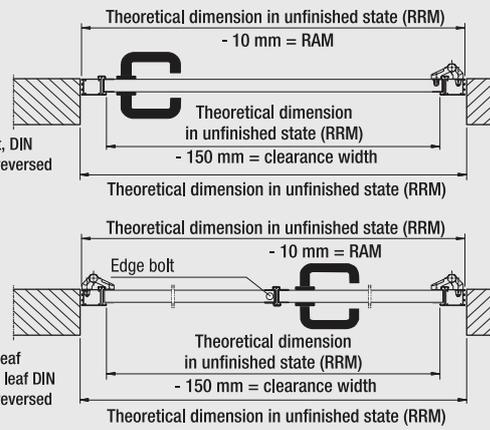


Installation behind the soffit, only inward opening

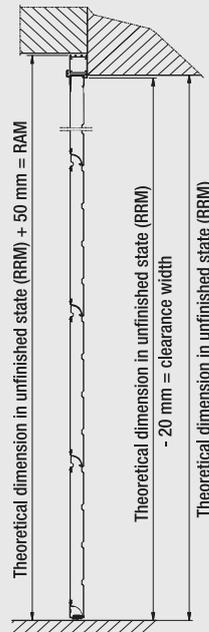

Caution: Frame outer dimension (RAM) = order size




Installation within the soffit, inward or outward opening

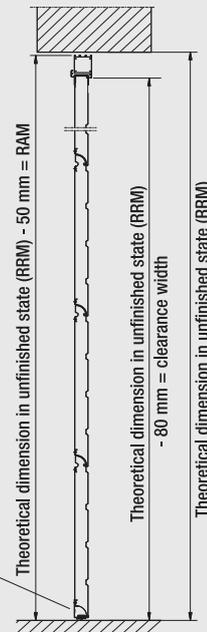

Georgian Doors

Horizontal doors have 2 columns of features as standard arranged 1/2 - 1/2, changing to an asymmetric three columns at the width shown right. 1/2 - 1/2 vertical doors have 2 rows of features as standard changing to three at the height shown right.

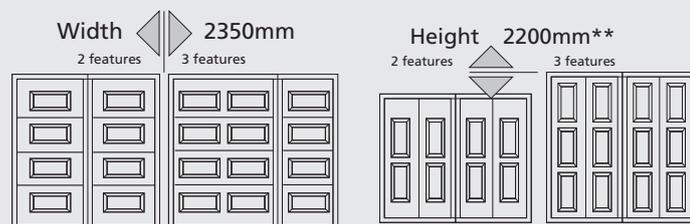

**2250mm with windows

Minimum width Georgian single leaf 850mm, double leaf 1350mm