Technical details



The highest level of comfort and safety to meet all requirements and wishes.

Flexible installation

The operator head can be turned through 90° to the left or right. It can therefore adapt flexibly to suit all configurations on site and the operator unit lighting can also be used to illuminate specific areas as required.



Flexible installation



Membe

The right operator boom for each garage door

With chain or toothed drive-belt system. Maintenance-free and stable. In addition, the toothed drive-belt system works extremely quiet. With the reinforced ball bearing boom, 1.2 mm thick, it is perfect for situations with particularly heavy loading, such as in underground garages with frequent traffic.

Boom	Length	Movement stroke
Short	3080 mm	2475 mm
Medium	3330 mm	2725 mm
Long	4090 mm	3485 mm




0800 525 442



Technical data		omfort?	, 60	onfort	20 Contort	280
Pull and thrust force (N)	55	0	75	50	1.000	6
Travel speed (mm/Sek.)	• 16	0	16	. 50	•• 160	2
Power consumption in stand-by (W)		4,0		4,0	4,0	
Light output (extendable)	-`¢	LED 40/80	-`(W)- LED 40/80	-ŵ- LED W 40/80	
Door width (mm)						
a) Sectional doors with single-wall door leaf	5.0	00	5.5	500	6.000	5.
b) Sectional doors with double-wall door leaf	3.0	00	5.5	500	6.000	3.
c) Up-and-over doors	3.5	00	5.0	000	6.000	3.
d) Retractable up-and-over doors and canopy doors, with door heights of up to 2.250 mm	3.5	00	5.0)00	6.000	3.
Door weight (kg)		90		165	200)
Emergency power (backup battery) (*Can be integrated)	back u	ир 700	back	up 700	back up 700	back
Rechargeable battery]				[
Solar]				[



Sectional doors

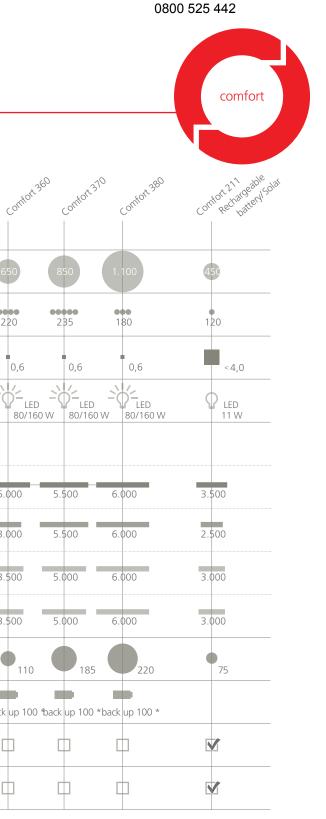



Up-and-over doors

0800 525 442