

NEW

ThermoCarbon entrance doors with excellent thermal insulation
 U_D -value of up to $0.47 \text{ W}/(\text{m}^2 \cdot \text{K})$



ThermoSafe / ThermoCarbon aluminium entrance doors

Elegant design, highest thermal insulation



The best choice for your home

Hörmann aluminium entrance doors




ThermoSafe aluminium entrance door

All styles at a glance



Style 45
Page 26

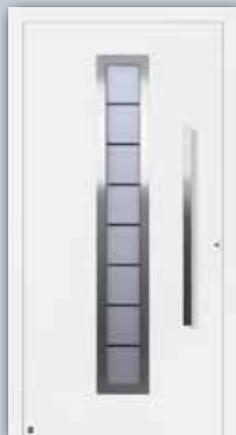

Style 65
Page 29



Style 188
Page 28



Style 501
Page 31



Style 502
Page 31



Style 503
Page 22



Style 504
Page 23



Style 505
Page 27



Style 560
Page 25




Style 650
Page 34



Style 667
Page 20



Style 680
Page 34

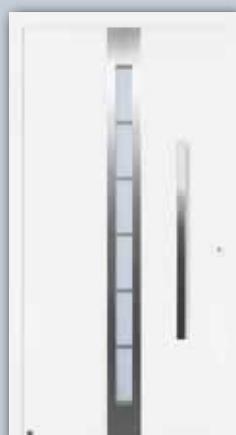

Style 686
Page 32



Style 697
Page 21



Style 860
Page 37

ThermoCarbon aluminium entrance door

All styles at a glance



Style 300
Page 41



Style 301
Pages 38 – 39



Style 302
Page 43



Style 304
Page 46



Style 305
Page 44



Style 306
Page 49



Style 308
Pages 50 – 51



Style 310
Page 47



Style 311
Page 44



Style 312
Page 43



Style 314
Page 49



Style 650
Page 34



Style 680
Page 35



Style 686
Page 32



Style 860
Page 37

Hörmann entrance doors for your home

Your new entrance door should be very special. It should match the style of your home and be prestigious, expressing your good taste. Do you also want an entrance door that meets high security standards and helps save energy with high thermal insulation values?

Aluminium offers everything!

Because aluminium doors are superior to plastic or timber doors in many ways. The advantages:

- Excellent thermal insulation
- High security
- High acoustic insulation
- High stability
- No follow-up painting necessary

Aluminium doors look new for years, and also offer you a large variety of options in regards to technical equipment and design.

ThermoSafe aluminium entrance door

If you want high thermal insulation and security for your home, we recommend our ThermoSafe door. With a 73 mm thick door leaf and the standard 5-point security lock, you not only save energy, but also protect your home from break-ins and keep out noise.

For more about ThermoSafe doors, see pages 10 – 17.

ThermoCarbon aluminium entrance door

Do you value excellent thermal insulation and the highest security? Then our ThermoCarbon entrance door is the perfect choice for you. The door leaf is 100 mm thick and the leaf profile is reinforced with carbon glass-fibre. This means ThermoCarbon doors are a great choice for low-energy houses! And with regards to security, the ThermoCarbon meets the highest demands thanks to its 9-point security lock. More benefits of the ThermoCarbon can be found on pages 10–17.

Exactly the door you want

Hörmann offers you many possibilities for getting exactly the door that best suits your home. Just about all the entrance door styles have optional glazings and colours of your choice. Side elements and/or transom lights are also possible. Discover all the possibilities from page 52.

Design overview	3 – 4
Brand quality from Hörmann	6 – 7
Good reasons to try Hörmann	8 – 9
ThermoSafe and ThermoCarbon product features	
Door construction	10 – 11
Exterior door view	12 – 13
Interior door view	14 – 15
Security features	16 – 17
Door styles	
ThermoSafe	18 – 37
ThermoCarbon	32 – 51
RC security features	54 – 55
Lock variants	56 – 57
Colours	58 – 59
Handles	60 – 61
Glazings	62 – 63

For more information on aluminium entrance doors and other Hörmann quality products, visit **www.hoermann.com**.

The colours and surface finishes shown are subject to the limitations of the printing process and cannot be regarded as binding.

Some of the products and equipment details described and illustrated in this catalogue are not standard, but available for a surcharge depending on the equipment option.

Descriptions and pictures, information about the scope of delivery, equipment and colour correspond to the time of printing. Subject to changes and errors.

Please contact your Hörmann Partner with reference to the current price list for specific door equipment.

All rights reserved. No part may be reproduced without our prior permission.

One name, one promise

Hörmann is brand quality you can trust



“A good reputation must be earned”. (August Hörmann)

In keeping with the tradition started by the company’s founder, the name Hörmann delivers brand name quality with extensive expertise. The family business has over 75 years of experience as a construction component specialist and sees itself as your partner from the very beginning of building and renovation projects. No surprise then, that Hörmann is one of Europe’s most successful entrance door providers. All of this gives you a good feeling when you purchase a Hörmann entrance door.



Made in Germany




Quality products from Germany

The entrance door construction is developed and manufactured by Hörmann. Our highly qualified employees work intensively on new products, continual further developments and improvements to details. Patents and unique products on the market are the result of this. Endurance tests under real conditions ensure mature series products with Hörmann quality.

CE mark in accordance to EN 14351-1

The CE mark confirms compliance with and observance of the principal requirements of the product standard EN 14351-1 for all of our entrance doors.

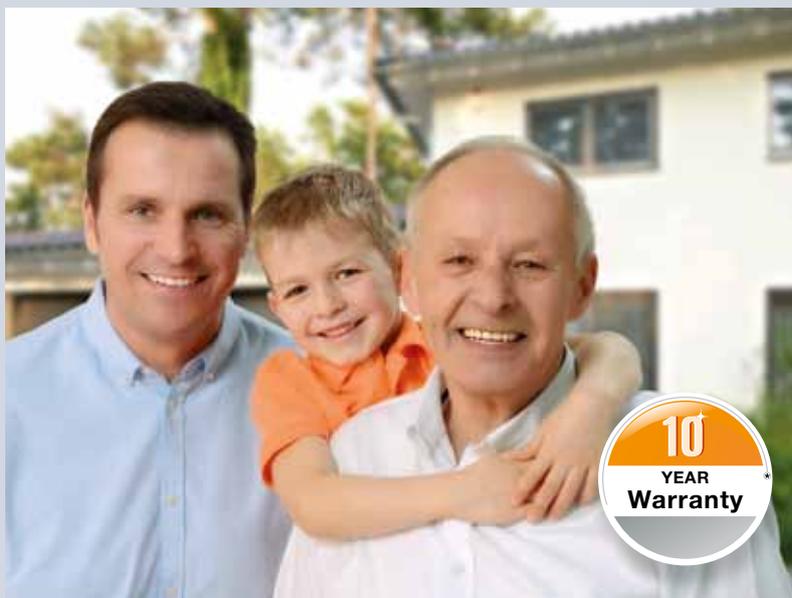

Entrance doors for generations

We are convinced of our products and our uncompromised quality assurance. That is why we issue a 10-year guarantee* on all Hörmann aluminium entrance doors.



An eye on the future

Hörmann is setting a good example. This is why, since 2013, the company obtains 40 % of its required energy from green sources and will continue to increase this percentage. At the same time, many tonnes of CO₂ are saved each year thanks to the introduction of an intelligent and certified energy management system. And last but not least, Hörmann offers products for sustainable construction.

* The complete warranty conditions can be found at: www.hoermann.com

Good reasons to try Hörmann

Innovations from the market leader



ThermoCarbon aluminium entrance doors with a U_D -value of up to $0.47 \text{ W}/(\text{m}^2\cdot\text{K})^*$



1

Door leaf without visible leaf frame

The ThermoSafe and ThermoCarbon entrance doors give you an exquisite and elegant reception. The shapely door leaf with its solid interior and exterior and leaf profile on the inside fulfils the highest design requirements. The interior view harmonises perfectly with the residential internal doors of your home.



The door interior looks like a residential internal door (Pictured: ThermoSafe entrance door)

2

Highest thermal insulation

ThermoSafe and ThermoCarbon entrance doors are the new generation of high-insulation entrance doors. ThermoSafe fulfils all the requirements of a low-energy house with excellent thermal values and triple thermal insulated glazing. ThermoCarbon entrance doors up the ante: with flush-fitting, 100 mm thick door leaf, thermal break thanks to carbon glass-fibre, standard triple or quadruple thermal insulated glazing and triple sealing, they provide maximum thermal insulation for low-energy house construction.

ThermoSafe
 U_D -value of up to $0.8 \text{ W}/(\text{m}^2\cdot\text{K})^*$

ThermoCarbon
 U_D -value of up to $0.47 \text{ W}/(\text{m}^2\cdot\text{K})^*$

* Door size $1350 \times 2350 \text{ mm}$ (the U_D -value is dependent on the door size)



Interior and exterior laminated safety glass



3

Break-in resistant locking

Our ThermoSafe and ThermoCarbon entrance doors set new standards for security. All doors are equipped with multiple-point locking as standard. This means the hinge side is better protected against forced opening.

You can also opt for ThermoSafe and ThermoCarbon entrance doors, side elements and transom lights with break-in resistant RC features – giving you and your family more security.



For further information, please see page 54.

4

Safe glazing

Accident prevention and break-in protection come first: ThermoSafe and ThermoCarbon entrance doors fulfil the highest demands of design and security. The 8 mm thick laminated safety glass on the interior and exterior of the insulated glazing provides maximum security. In case of breakage, the glass splinters are bound and stay adhered to the plastic film on the inside, ensuring that there is no danger of being injured by the shards. Furthermore, the laminated safety glass offers better protection against burglars, because it makes reaching through more difficult.

Thanks to a highly insulated edge compound with thermal break (warm edge), the glazing offers high thermal insulation for effective energy saving and high acoustic insulation for more peaceful living conditions.

ThermoSafe aluminium entrance door

Door construction

With a 73 mm thick door leaf, ThermoSafe entrance doors are especially suitable for low-energy houses. This door version provides a range of benefits:


- 1** Solid 73 mm aluminium door leaf with PU rigid foam infill and internal leaf profile
- 2** Aluminium leaf profile with thermal break
- 3** 80 mm aluminium door frame with thermal break
- 4** Double sealing with an all-round seal

Especially high thermal insulation

U_D -value up to $0.8 \text{ W}/(\text{m}^2 \cdot \text{K})$

Approved by IFT Rosenheim
Door size 1350 × 2350 mm

Full-scale

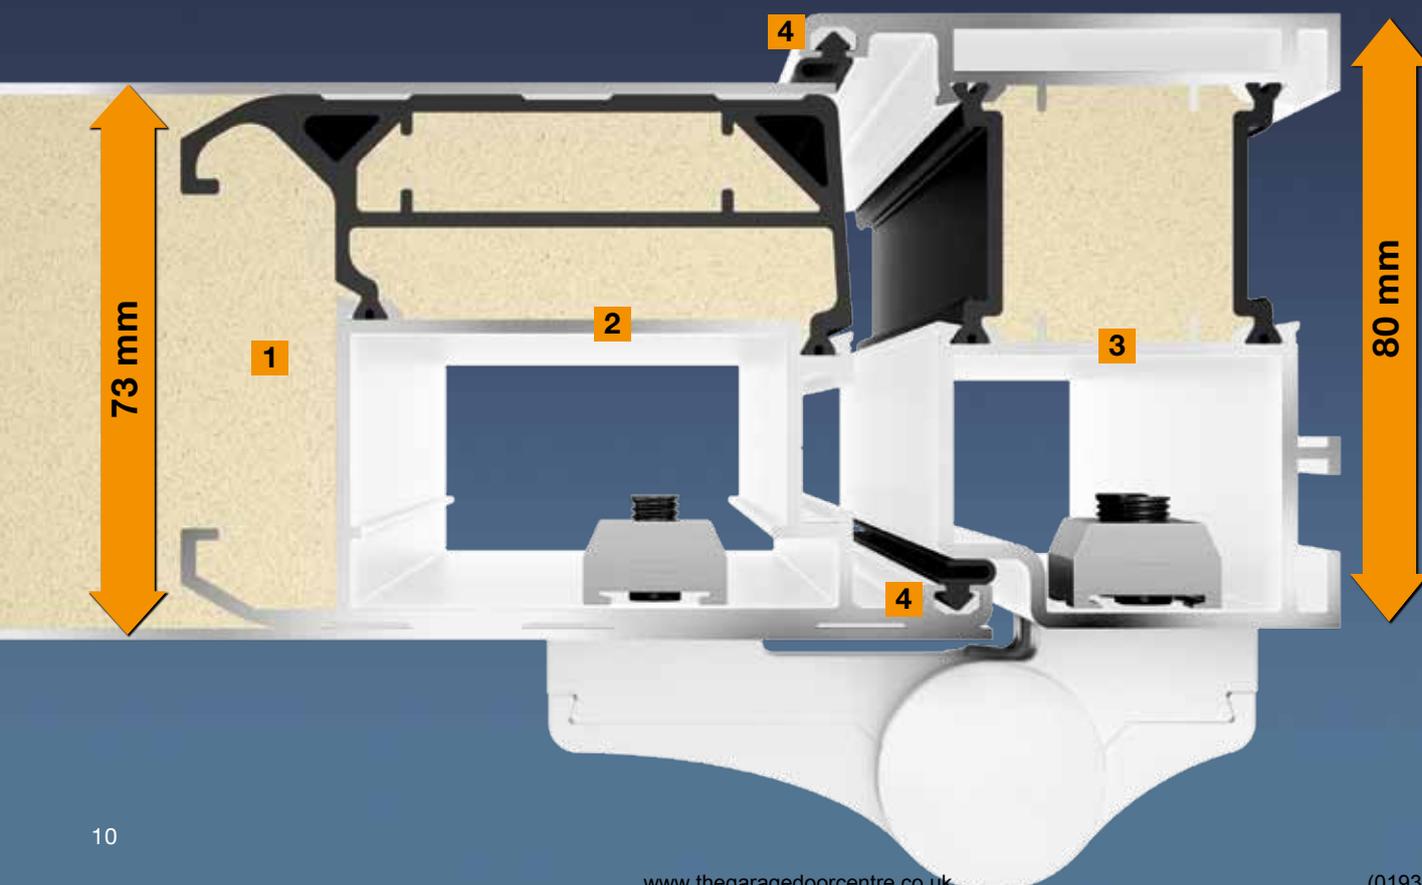

ThermoCarbon aluminium entrance door

Door construction

Thanks to a 100 mm thick door leaf, ThermoCarbon entrance doors are ideally suited to low-energy houses. The doors offer compelling, excellent benefits for your home:


- 1** Solid 100 mm aluminium door leaf with PU rigid foam infill and internal leaf profile
- 2** Thermal break and high stability thanks to carbon glass-fibre reinforced composite leaf profile
- 3** 111 mm aluminium door frame with thermal break
- 4** Triple sealing with two all-round seals

Excellent thermal insulation

**U_D-value
of up to
0.47 W/(m²·K)**

Approved by IFT Rosenheim
Door size 1350 × 2350 mm

Full-scale

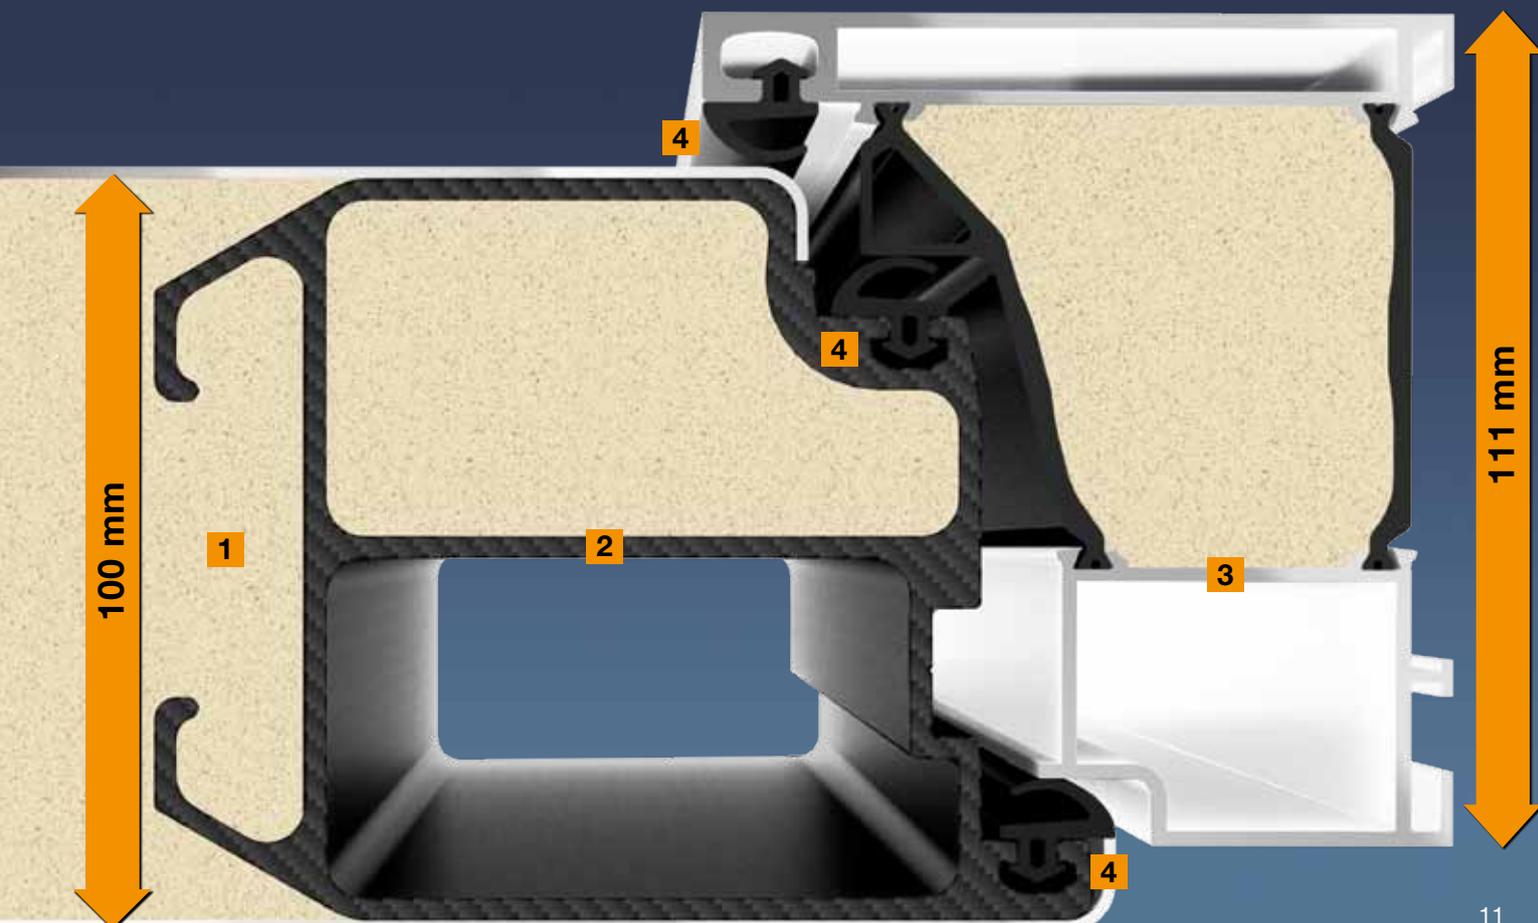

ThermoSafe aluminium entrance door

Exterior door view



With stylish, coordinated design elements, the ThermoSafe aluminium entrance door is visually impressive across the board:

Solid interior and exterior door leaf view

No visible door profile interrupts the look of the door. This means the entrance door looks generously proportioned from the outside, while the interior view harmonises perfectly with your residential internal doors.

Door frame with 70 mm profile view

Standard for fitting in the opening.

Optional frame variants for an individual look

Broader door frames


On request, door frames are also available in a width of 110 mm, for a more convenient and attractive connection to full thermal insulation, for example.

Fascia frame Rondo 70

The rounded frame profile adds a stylish touch to your entrance door, providing it with a particularly harmonious look with its rounded edges.

Fascia frame Caro 70

This version has an attractive and distinguished look that upgrades the appearance of your door through the frame's added appearance of depth.

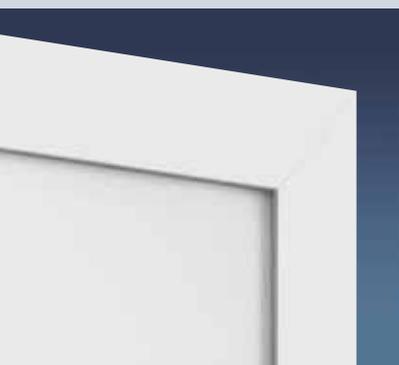

Broader door frame with 110 mm profile view



Fascia frame Rondo 70



Fascia frame Caro 70

ThermoCarbon aluminium entrance door

Exterior door view



The ThermoCarbon aluminium entrance door offers you individual design possibilities and protects your home, making it not only secure, but also stylish:

Solid interior and exterior door leaf view

No visible door profile interrupts the look of the door. This means the entrance door looks generously proportioned from the outside, while the interior view harmonises perfectly with your residential internal doors.

Door frame with 100 mm profile view

Standard for fitting in the opening.

Flush-fitting exterior handles for exclusive door styles

Stainless steel handle with recessed grip


With a stainless steel handle, you can choose the colour of the recessed grip to suit your entrance door.

Continuous aluminium handle bar

The continuous look of the handle bar is its distinguishing feature. It comes as standard in White aluminium, RAL 9006, with a recessed grip in the door colour.

Aluminium handle bar with recessed grip

This handle version comes as standard as anodised aluminium, E6 / EV 1, with a recessed grip in the door colour.

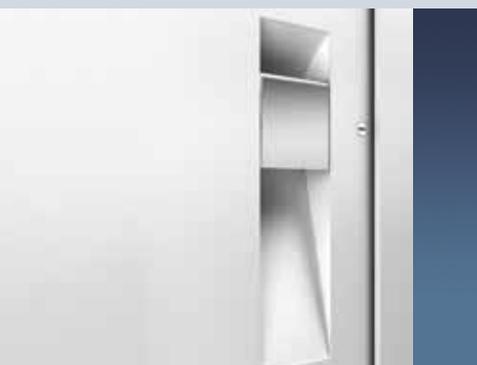

Stainless steel handle with recessed grip



Continuous aluminium handle bar



Aluminium handle bar with recessed grip

ThermoSafe aluminium entrance door

Interior door view



Quality is in the details. The ThermoSafe offers numerous features, all of which are practical and convenient for your home:

3-way adjustable hinges

The beautifully designed three-way hinges allow the ThermoSafe entrance door to be variably adjusted. This way, your entrance door is optimally sealed and falls smoothly and securely into its lock. You can also opt for elegant, concealed hinges (incl. leverage protection).

Tamper-proof profile cylinder

The profile cylinder is equipped with an anti-picking system and drill protection. In addition, it offers an emergency and hazard function, i.e. the door lock can still be operated when a key is inserted on the inside. The tamper-proof locking cylinder is certified according to DIN 18252 and is delivered with 5 reversible keys.

Aluminium interior lever

ThermoSafe entrance doors are equipped as standard with the attractive Rondo interior lever, stove-enamelled in white. Optionally, it is also available in stainless steel or your choice of RAL as well as the versions Caro or Okto, also in stainless steel.

Stainless steel lock plates

The lock plates ensure a convenient adjustment of the door, so that your door falls shut optimally and can be closed securely.



Aluminium interior lever



Stainless steel lock plates

ThermoCarbon aluminium entrance door

Interior door view



The ThermoCarbon is not only unsurpassed for thermal insulation and security, the door's features offer you everything you want and more:

Concealed hinges

The hinges of the ThermoCarbon entrance door are concealed between the door frame and leaf, i.e. they are not visible either from inside or outside: a visually elegant solution for your home. The door leaves can be simply and easily adjusted. This way, you can close your entrance door comfortably and securely at all times.

Tamper-proof profile cylinder

The tamper-proof profile cylinder, certified in accordance with DIN 18252, features premium fittings: an anti-picking system, drill protection, and an emergency and hazard function. This means that the door lock can still be operated when a key is inserted on the inside. 5 reversible keys are delivered with the door.

Stainless steel interior lever

The elegant Caro stainless-steel interior lever is standard for ThermoCarbon entrance doors.

Continuous stainless steel closing strip

The high-quality stainless steel closing strip is elegantly integrated into the door frame, and enables optimum adjustment of the door. This means it falls shut securely and is just as securely locked, allowing you to enjoy Hörmann's high brand quality for a long time to come.



Stainless steel interior lever



Stainless steel closing strip

ThermoSafe aluminium entrance door

Security features



Being able to rest easy in your own home is important. This is why the ThermoSafe entrance doors are equipped with multiple-point locking as standard.

5-point security lock H5 and security bolts on the hinge side

When locking, 3 steel hooks with 2 additional bolts pivot into the stainless steel lock plates. The swing bolt makes pulling apart or forcing open the door more difficult.

Exterior surface-mounted security rose escutcheon

The patented exterior rose escutcheon also protects the profile cylinder against being drilled open and twisted off. Delivered as standard in Traffic white RAL 9016, or in stainless steel for coloured doors.

Optional: break-in resistant RC security features

This increased security is available for entrance doors, side elements and transom lights with RC 2 and RC 3 features from early 2014. For further information, please see page 54.



Surface-mounted security rose escutcheon

Security bolts



5-point security lock H5

ThermoCarbon aluminium entrance door Security features



The ThermoCarbon is the embodiment of security: the standard features with H9 security lock offer you the best possible protection.

9-point security lock H9 and concealed hinges that cannot be forced open

The ThermoCarbon is locked with 5 swing bolts and 4 steel bolts. This top security protects your door with just one turn of a key.

Exterior flush-fitting security rose escutcheon

The stainless steel security rose escutcheon fits into the door leaf particularly elegantly, and also protects the profile cylinder against being drilled open.

Optional: break-in resistant RC security features

This increased security is available for entrance doors and side elements with RC 2, RC 3 and RC 4 features from early 2014.

For further information, please see page 54.



Flush-fitting security rose escutcheon



Concealed hinges that cannot be forced open



9-point security lock H9

Stylish door variants for a safe home

Discover your favourite entrance door





Distinct lines

Combined with glass and stainless steel



ThermoSafe **style 667**
In Traffic white, matt, RAL 9016, with MG 667 side elements



ThermoSafe **style 697**
In Hörmann colour CH 703 with fascia frame Rondo 70

Style 667

Stainless steel handle HOE 910, matt Parsol grey design glass with 7 clear stripes, triple thermal insulation glass

MG 667 side element

Design glass infill, matt Parsol grey with 7 clear stripes, triple thermal insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

Style 697

Stainless steel handle HOE 910, stainless steel embellishments, matt Parsol grey design glass with 7 clear stripes, triple thermal insulation glass

MG 697 side element

Design glass infill, matt Parsol grey with 7 clear stripes, triple thermal insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*


* Door size 1230 × 2180 mm

Make your home your castle

Individual design for your home



ThermoSafe **style 503**
In Hörmann colour CH 703 with side elements and up-and-over door style 985 in Hörmann colour CH 703

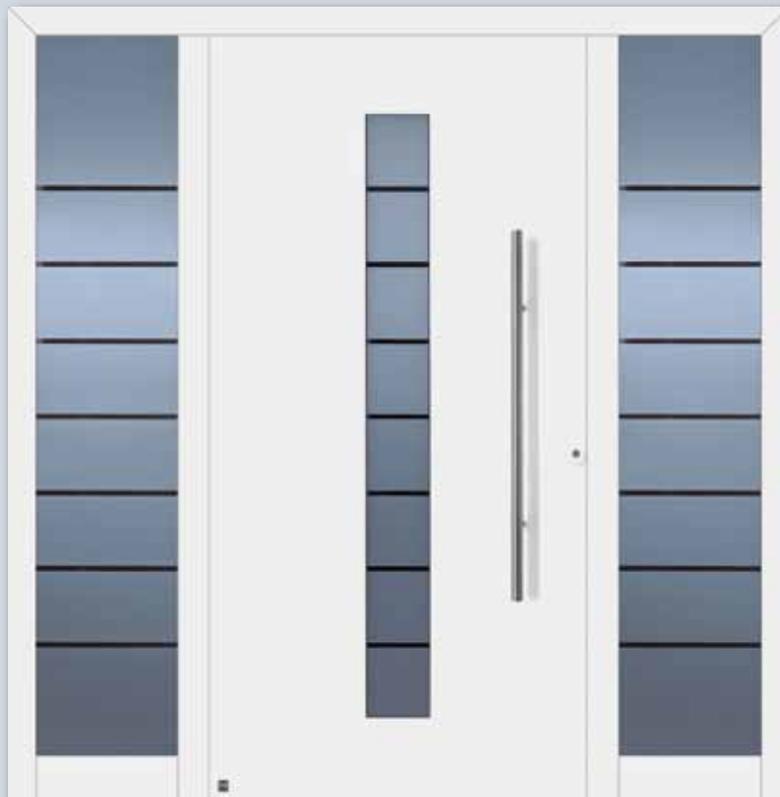

ThermoSafe **style 503**
In Traffic white, matt, RAL 9016, with MG 503 side elements



With the practical **door configurator** on www.hoermann.de, you can take your time to choose different designs and versions, upload an image of your own home, insert the entrance door of your choice and take in the overall appearance. Please see our **price compass** for recommended retail pricing for your preferred entrance door.



Style 503

Stainless steel grip HOE 500, matt float design glass with 7 clear horizontal stripes, triple thermal insulation glass

Side element MG 503

Design glass infill matt float with 7 clear horizontal stripes, triple insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

Style 504

Stainless steel handle HOE 500, matt Parsol grey design glass with 5 clear horizontal stripes, triple thermal insulation glass

MG 504 side element

Design glass infill, matt Parsol grey with 5 clear horizontal stripes, triple thermal insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*



ThermoSafe **style 504**
In Hörmann preferred colour Moss green,
matt, RAL 6005

* Door size 1230 × 2180 mm

Harmonious combination

Perfectly matched stainless steel and glass with clear stripes





ThermoSafe **style 560**
In Hörmann colour CH 703 with fascia frame Rondo 70

Style 560

Stainless steel handle HOE 600, stainless steel embellishment, design glass with matt exterior and 11 clear stripes, Satinato interior, triple thermal insulation glass

MG 560 side element

Design glass infill, matt exterior with 13 clear stripes, Satinato interior, triple thermal insulation glass


Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

* Door size 1230 × 2180 mm

Setting accents with Hörmann

Elegant look, inventive glazing cut-outs

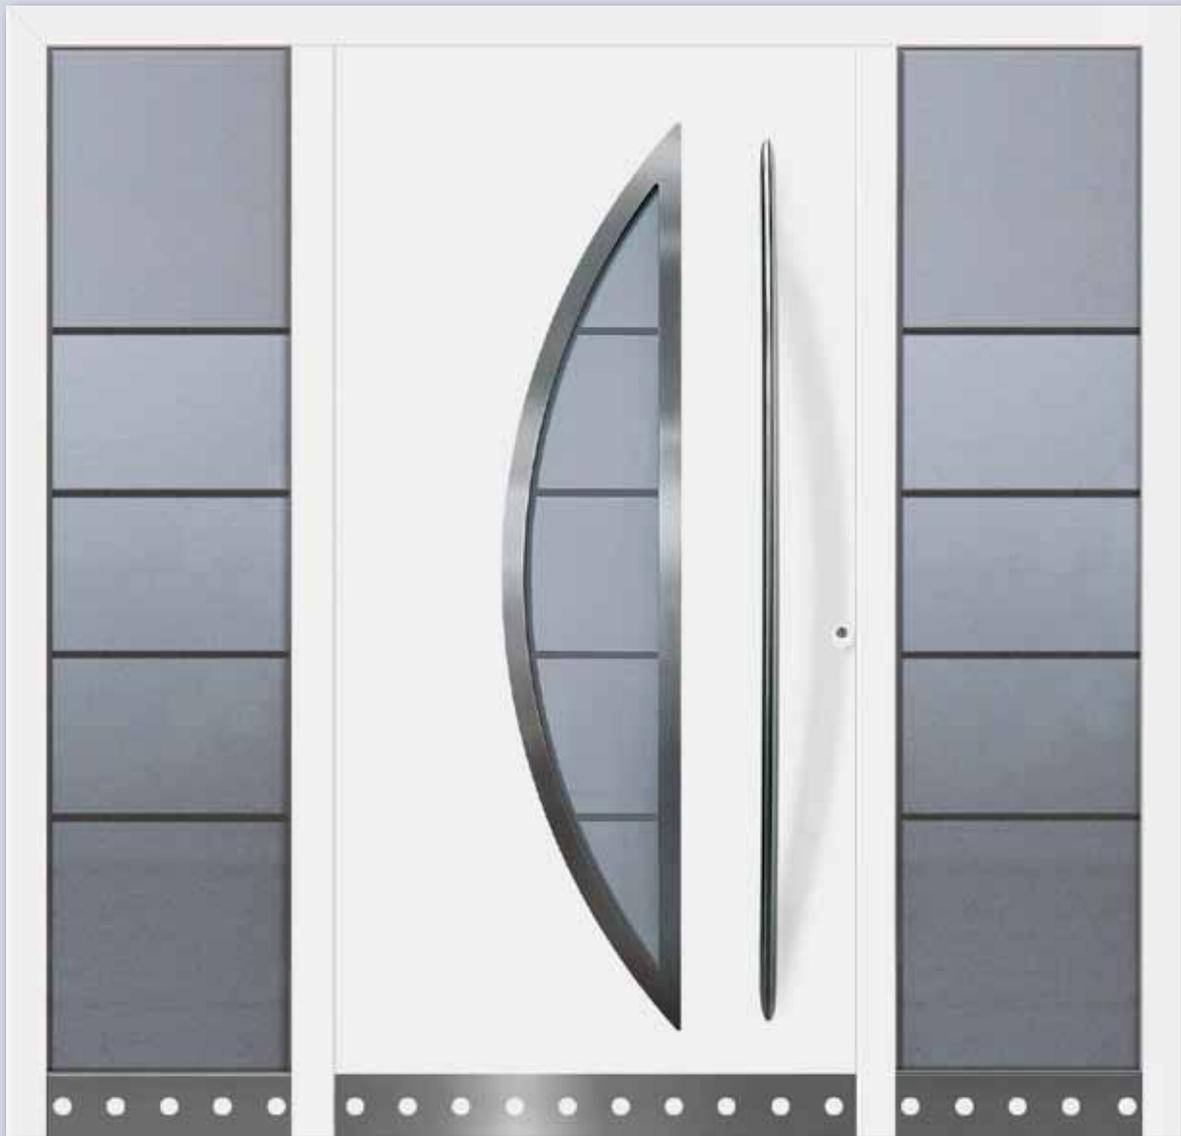

ThermoSafe **style 45**
In Traffic white, matt, RAL 9016, with MG 45 side elements and perforated stainless steel bottom sheet



ThermoSafe **style 505**
in Hörmann colour CH 703

Style 45

Stainless steel handle HOE 200, stainless steel embellishment, matt Parsol grey design glass with 4 clear stripes, triple thermal insulation glass

Side element MG 45

Design glass infill, matt Parsol grey with 4 clear stripes, triple thermal insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

Style 505

Stainless steel handle HOE 500, matt Parsol grey design glass with 4 clear stripes, triple thermal insulation glass

Side element MG 505

Design glass infill, matt Parsol grey with 4 clear stripes, triple thermal insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

* Door size 1230 × 2180 mm

Entrance door and garage door in harmony

Perfectly matched design



ThermoSafe **style 188**

In Traffic white, matt, RAL 9016 and L-ribbed sectional garage door design style 457 in Traffic white, RAL 9016



ThermoSafe **style 188**

In Hörmann colour CH 703 with MG 188 side elements



ThermoSafe **style 65**
Traffic white, matt, RAL 9016

Style 188

Stainless steel handle HOE 100, stainless steel embellishment, matt Stopsol grey design glass with 3 clear stripes, triple thermal insulation glass

MG 188 side element

Design glass infill, matt Stopsol grey with 3 clear stripes, triple thermal insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

Style 65

Stainless steel handle HOE 600, stainless steel embellishment, matt float design glass with 7 clear stripes, triple thermal insulation glass

Side element MG 65

Design glass, matt float with 7 clear stripes, triple insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

* Door size 1230 × 2180 mm

Elegant design

Simply inviting





ThermoSafe **style 501**
In preferred colour Window grey, matt,
RAL 7040



ThermoSafe **style 502**
Traffic white, matt, RAL 9016

Style 501

Stainless steel handle HOE 500, Mastercarré
ornamental glass, triple thermal insulation glass

Side element

Ornamental glass infill, triple thermal
insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

Style 502

Stainless steel handle HOE 500, Mastercarré
ornamental glass, triple thermal insulation glass

Side element

Ornamental glass infill, triple thermal
insulation glass

Door version

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*

* Door size 1230 × 2180 mm

Subtle light trapping

With continuous stainless steel embellishment



ThermoCarbon **style 686**
In preferred colour Window grey, matt, RAL 7040



ThermoSafe **style 686**
In preferred colour Ruby red, matt, RAL 3003



Style 686

Stainless steel handle HOE 600, stainless steel embellishment, matt float design glass with 7 clear stripes, triple/quadruple thermal insulation glass

MG 686 side element

Design glass, matt float with 7 clear stripes, triple insulation glass

Door versions

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*
- **ThermoCarbon**
U_D-value 0.55 W/(m²·K)*

* Door size 1230 × 2180 mm

Timeless elegance

Glass and stainless steel harmoniously combined



ThermoSafe **style 680**
In preferred colour Slate grey, matt, RAL 7015, with side element and L-ribbed sectional garage door, New Silkgrain in Slate grey, RAL 7015



ThermoSafe **style 650**
Traffic white, matt, RAL 9016



ThermoCarbon **style 650**
In preferred colour White aluminium, silk gloss, RAL 9006



ThermoCarbon **style 680**
in Hörmann colour CH 703

Style 650

Stainless steel handle HOE 700, Pave white ornamental glass, triple/quadruple thermal insulation glass

Side element

Ornamental glass infill, triple thermal insulation glass

Door versions

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*
- **ThermoCarbon**
U_D-value 0.57 W/(m²·K)*

Style 680

Stainless steel handle HOE 700, stainless steel embellishment, Pave white ornamental glass, triple/quadruple thermal insulation glass

Side element

Ornamental glass infill, triple thermal insulation glass


Door versions

- **ThermoSafe**
U_D-value of up to 0.9 W/(m²·K)*
- **ThermoCarbon**
U_D-value 0.57 W/(m²·K)*

* Door size 1230 × 2180 mm

Minimalist design

Express your sense of style with the right entrance door

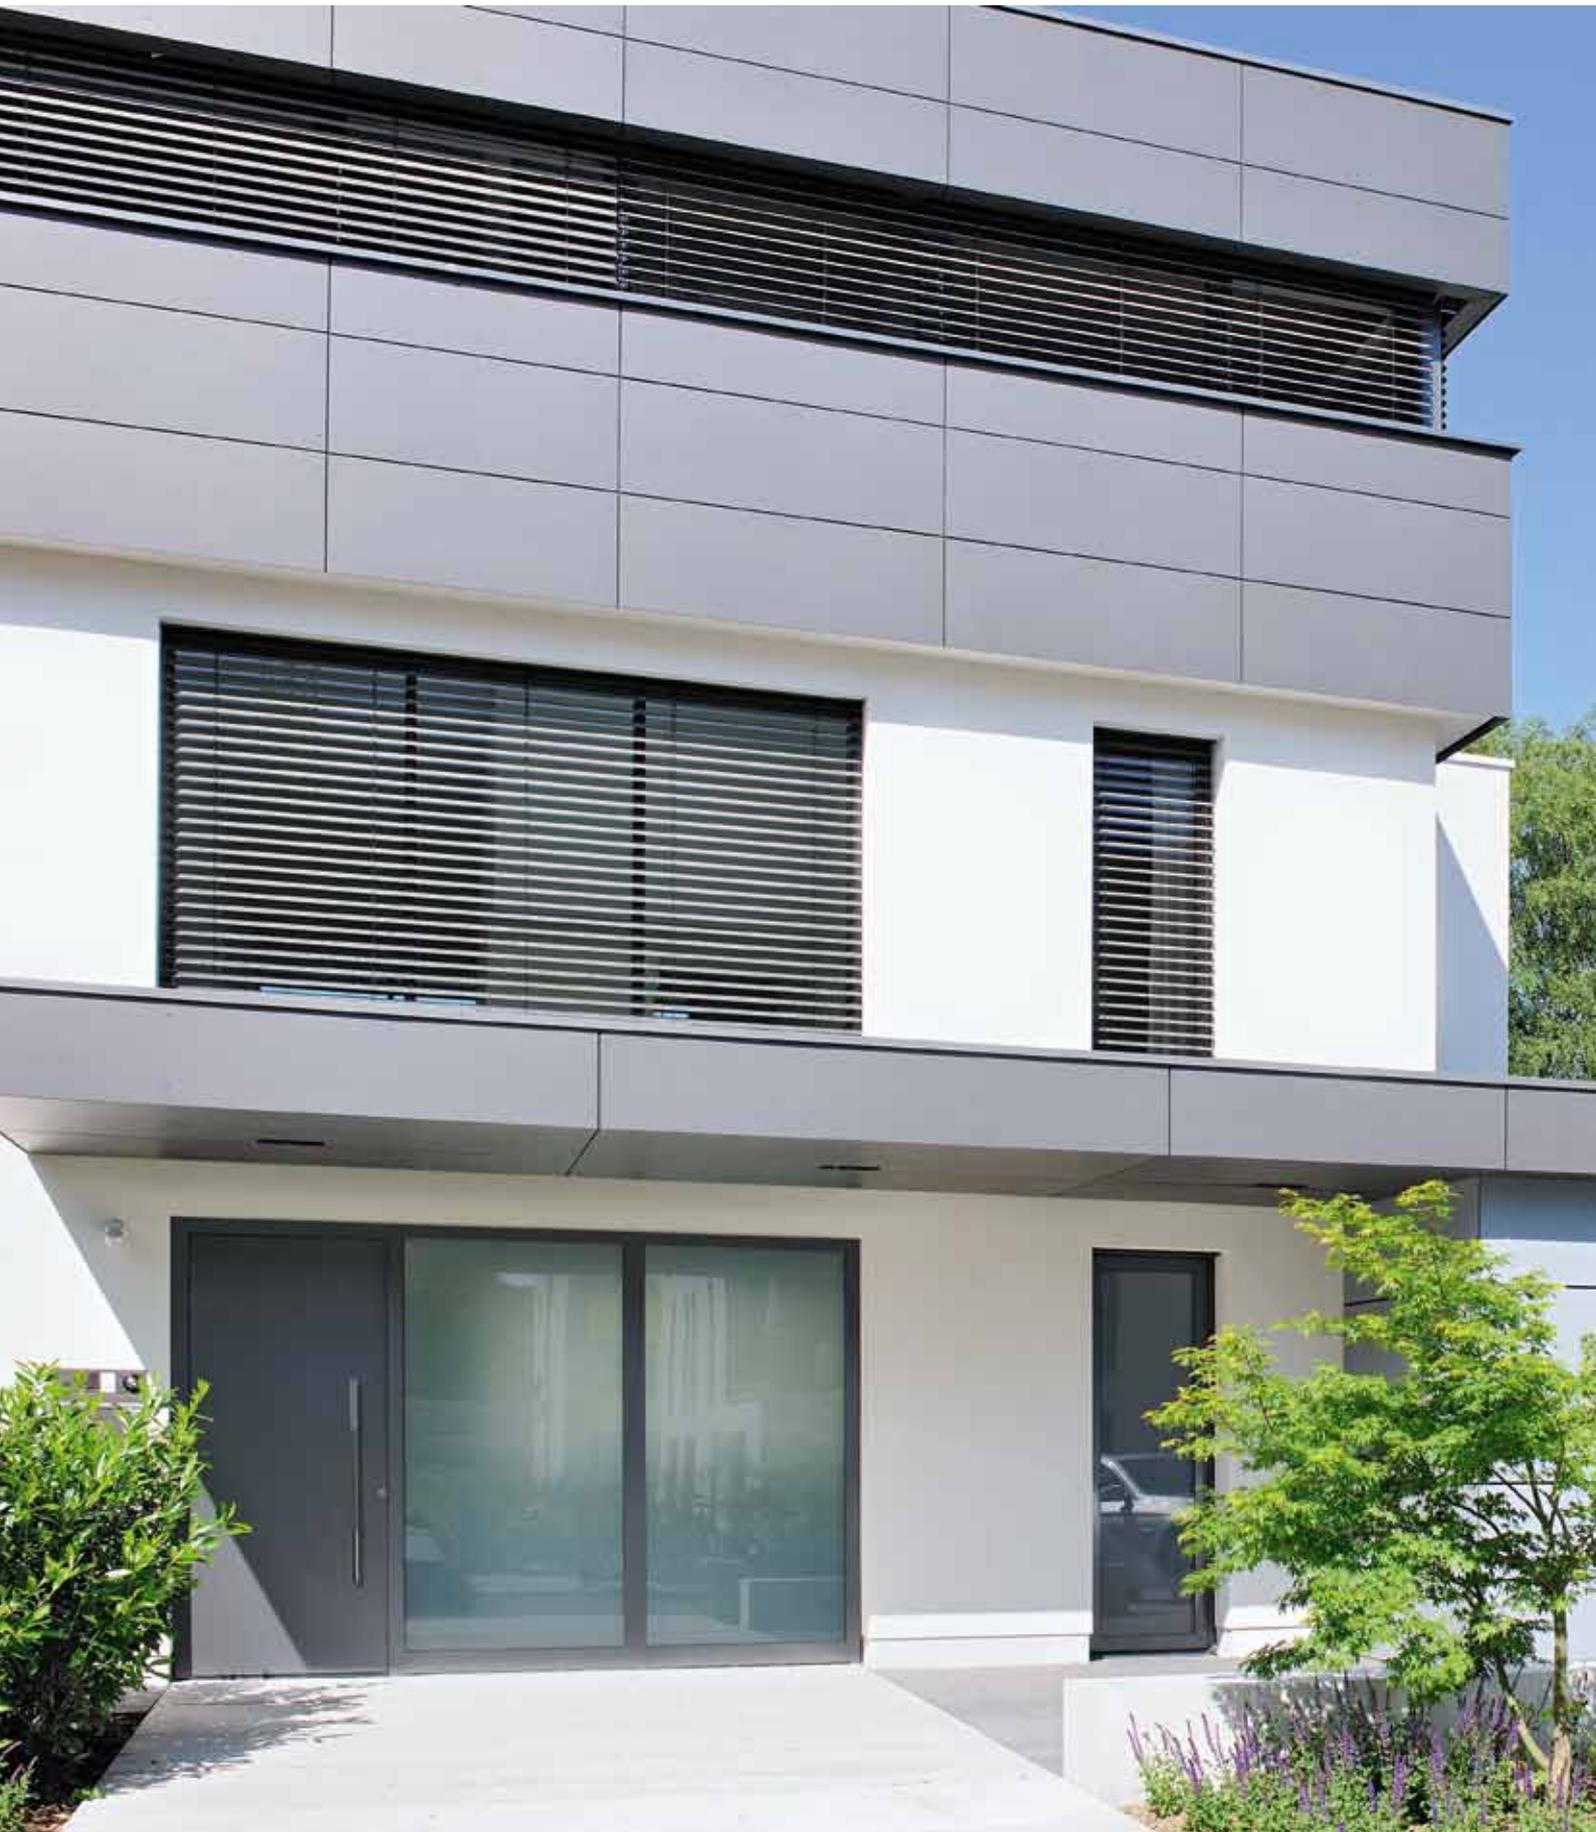



ThermoSafe **style 860**
Traffic white, matt, RAL 9016



ThermoCarbon **style 860**
In preferred colour Ruby red, matt, RAL 3003

Style 860

Stainless steel handle HOE 700

Side element

Ornamental glass infill, triple thermal insulation glass

Door versions

- **ThermoSafe**
U_D-value of up to 0.8 W/(m²·K)*
- **ThermoCarbon**
U_D-value 0.50 W/(m²·K)*

* Door size 1230 × 2180 mm

Elegantly coordinated colours

Individual accents for door, flush-fitting handle bar and embellishment



ThermoCarbon **style 301**
In Traffic white, matt, RAL 9016, aluminium embellishment in Graphite black RAL 9011, handle bar and recessed grip in preferred colour Ruby red, matt, RAL 3003



ThermoCarbon **style 301**
In preferred colour Slate grey, matt, RAL 7015, aluminium embellishment in preferred colour White aluminium, silk-gloss, RAL 9006, handle bar in preferred colour White aluminium, silk-gloss, RAL 9006, recessed grip in door colour



Style 301

Flush-fitting handle bar in anodised aluminium, E6 / EV 1, recessed grip in door colour, aluminium embellishment

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.50 W/(m²·K)*



ThermoCarbon **style 301**
In preferred colour Window grey, matt, RAL 7040, aluminium embellishment in preferred colour Moss green, matt, RAL 6005, handle bar in anodised aluminium, E6 / EV 1, recessed grip in door colour

* Door size 1230 × 2180 mm

For an atmospheric overall appearance

Flush-fitting exterior handles – harmoniously integrated into the door leaf





ThermoCarbon **style 300**

In preferred colour Fir green, matt, RAL 6009, handle bar in anodised aluminium, E6 / EV 1, recessed grip in door colour

Style 300

Flush-fitting handle bar in anodised aluminium, E6 / EV 1, recessed grip in door colour

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.50 W/(m²·K)*

* Door size 1230 × 2180 mm

Design within reach

Make your guests feel welcome





ThermoCarbon **style 302**
In preferred colour Window grey, matt, RAL 7040, handle bar
in anodised aluminium, E6 / EV 1, recessed grip in door colour



ThermoCarbon **style 312**
In Traffic white, matt, RAL 9016, handle bar in Traffic white,
RAL 9016, recessed grip in door colour

Style 302

Flush-fitting handle bar in anodised aluminium, E6 / EV 1, recessed grip in door colour, aluminium embellishment, matt float design glass with one clear stripe, triple thermal insulation glass

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.57 W/(m²·K)*

Style 312

Flush-fitting handle bar in anodised aluminium, E6 / EV 1, recessed grip in door colour, aluminium embellishment, matt float design glass with one clear stripe, triple thermal insulation glass

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.57 W/(m²·K)*

* Door size 1230 × 2180 mm

Elegant and eye-catching

Stylishly coordinated colours, shapes and materials



ThermoCarbon **style 305**
In Hörmann colour CH 703, aluminium embellishment in preferred colour Ruby red, matt, RAL 3003, stainless steel handle, recessed grip in door colour



ThermoCarbon **style 311**
In Traffic white, matt, RAL 9016, carbon embellishment, stainless steel handle, carbon recessed grip



Style 311 with recessed grip and embellishment in high-quality carbon



Style 311

Flush-fitting stainless steel handle, carbon recessed grip, carbon embellishment

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.50 W/(m²·K)*

Style 305

Flush-fitting stainless steel handle, recessed grip in door colour, aluminium embellishment

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.50 W/(m²·K)*

* Door size 1230 × 2180 mm

Innovative handles

Integrated flush with the door leaf



ThermoCarbon **style 304** and SolidStyle residential internal door



ThermoCarbon **style 304**
In Hörmann colour CH 703, stainless steel handle, recessed grip in preferred colour White aluminium, silk-gloss, RAL 9006



ThermoCarbon **style 304**
In Traffic white, matt, RAL 9016, stainless steel handle, recessed grip in door colour



Style 304

Flush-fitting stainless steel handle, recessed grip in door colour

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.50 W/(m²·K)*

Style 310

Flush-fitting stainless steel handle, recessed glazing cut-out, matt float ornamental glass, triple thermal insulation glass

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.63 W/(m²·K)*



ThermoCarbon **style 310**
In preferred colour Window grey, matt, RAL 7040

* Door size 1230 × 2180 mm

Welcome home!

Stylish door design





ThermoCarbon **style 306**
In Hörmann colour CH 607, stainless steel handle, recessed grip in preferred colour White aluminium, silk-gloss, RAL 9006



ThermoCarbon **style 314**
In Traffic white, matt, RAL 9016, stainless steel handle, recessed grip in door colour

Style 306

Flush-fitting stainless steel handle, recessed grip in door colour, stainless steel embellishment, matt float ornamental glass, quadruple thermal insulation glass

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.57 W/(m²·K)*

Style 314

Flush-fitting stainless steel handle, recessed grip in door colour, matt float ornamental glass, quadruple thermal insulation glass

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.57 W/(m²·K)*

* Door size 1230 × 2180 mm

High-quality aluminium handle bar

The visual highlight of your entrance door



ThermoCarbon **style 308**
In Traffic white, matt, RAL 9016, handle bar and recessed grip in preferred colour Anthracite grey, matt, RAL 7016



ThermoCarbon **style 308**

In preferred colour Slate grey, matt, RAL 7015, handle bar in White aluminium, RAL 9006, recessed grip in door colour

Style 308

Flush-fitting handle bar in White aluminium, RAL 9006, recessed grip in door colour

Side element

Ornamental glass infill, triple thermal insulation glass

Door version

- **ThermoCarbon**
U_D-value 0.51 W/(m²·K)*

* Door size 1230 × 2180 mm

Features tailored to your needs

Your entrance door becomes your signature





Your ThermoSafe and ThermoCarbon entrance doors can be fitted out individually according to your desires. From increased security with RC features, to more convenience through automatic locks, to individual colours, handles or glazings, all suited to your taste or the style of your house.

RC security features	54 – 55
Lock variants	56 – 57
Colours	58 – 59
Handles	60 – 61
Glazings	62 – 63

Security you can count on

Hörmann entrance doors offer increased protection for your home as standard

Perfectly protected with standard and optional extras

You can rely on the high quality of Hörmann entrance doors when it comes to security. All doors have multiple-point locking as standard and can also have optional features added. The ThermoSafe and ThermoCarbon entrance doors, side elements and transom lights* are available on request with especially break-in resistant RC features.



Proven security means you feel at ease

It is good to know that the proven security of Hörmann entrance doors remains, even though the designation is new: instead of "WK" for "Widerstandsklasse" (German for resistance class), the designation is now RC for "resistance class". The testing requirements have also become stricter, now checking to see how much time a potential burglar needs to break in and which tools are used. The carefully tested break-in protection is also recommended by the police information centres. You can also find more information here: www.einbruchschutz.polizei-beratung.de (in German)



Invisible security

Increased security doesn't mean that the door can't look good. The optional RC versions include a break-in resistant door version with special security glazings, among other things. The additional security features are not visible in the door. That's brand quality from Hörmann!



Optionally available for all ThermoSafe and ThermoCarbon entrance doors, side elements and transom lights*



Optionally available for all ThermoSafe and ThermoCarbon entrance doors, side elements and transom lights*



Optional for all ThermoCarbon entrance doors



Securing excellent properties

Automatic lock variants for more security and convenience

ThermoSafe

5-point automatic lock S5 Automatic

The latch catch lock with mechanical self-locking function is optionally available for your ThermoSafe entrance door. Here's how it works: when the door falls shut, the latch and bolt automatically extend and securely lock the entrance door.

5-point automatic lock S5 Comfort

The S5 Comfort lock is additionally equipped with an electric motor for releasing the self-locking function. The power and data signals are wirelessly transmitted from door frame to door leaf via the **HOE Connect** contact strip. This eliminates an annoying cable!


ThermoCarbon

7-point automatic lock S7 Automatic

All ThermoCarbon entrance doors can be optionally equipped with a latch catch lock with seven latches and bolts, which automatically extend when the door is closed.

7-point automatic lock S7 Comfort

The additional electronic motor for releasing the self-locking function ensures convenient opening of your ThermoCarbon entrance door. With the innovative **HOE Connect** contact strip, the power and data signals are wirelessly transmitted from door frame to door leaf. The advantage: no more annoying cable!

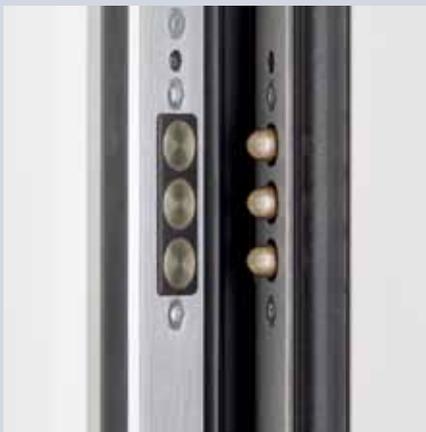

Very practical: HOE Connect



Graduated operating comfort

With the S5 / S7 automatic lock

Hörmann offers different convenience packages (S5 for ThermoSafe and S7 for ThermoCarbon entrance doors) that provide you with extra convenience and security:

S5 / S7 Comfort automatic lock

Your entrance door can be opened comfortably at the push of a button from the inside, e.g. via the house intercom. This is especially suited for blocks of flats.

S5 / S7 Scan automatic lock

Opening your entrance door with your fingerprint means you don't need a key any more. The finger scanner recognises up to 100 fingerprints and can be taught in without a computer.

S5 / S7 Code automatic lock

Simply entering your personal security code opens your entrance door from outside.

S5 / S7 Radio automatic lock ↔ BiSecur

Open your entrance door comfortably and securely using the HSE 2 BS hand transmitter. The newly developed and extremely safe BiSecur radio system ensures that no unauthorised person can copy your radio signal. In addition, you can also use the same hand transmitter to operate your Hörmann garage door or entrance gate. The S5 / S7 Radio remote control can also be installed in the S5 / S7 Scan and S5 Code convenience packages.

The HSE 2 BS hand transmitter is available with a black high-gloss surface or in a carbon look.



Standard for the S7 Radio automatic lock for ThermoCarbon entrance doors



Standard for the S5 Radio automatic lock for ThermoSafe entrance doors



Further information and other BiSecur radio accessories can be found in the Garage door and entrance gate operators brochure.



S5 / S7 Comfort – open the door at the push of a button



S5 / S7 Scan – open the door with your fingerprint



S5 / S7 Code – open the door by entering a code




S5 / S7 Radio – open the door using BiSecur radio


Full range of colours for you

To match your entrance door to your home



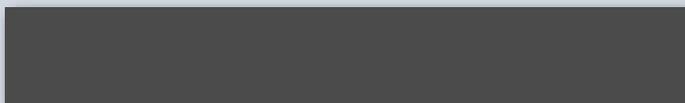

Hörmann colour CH 703 Anthracite, structured

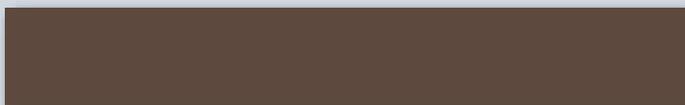

Hörmann colour CH 607, Chestnut, structured




Traffic white, high gloss, RAL 9016



White aluminium, silk-gloss, RAL 9006




Terra brown, matt, RAL 8028




Window grey, matt, RAL 7040



Anthracite grey, matt, RAL 7016



Slate grey, matt, RAL 7015

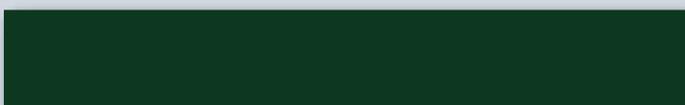

Fir green, matt, RAL 6009



Moss green, matt, RAL 6005



Ruby red, matt, RAL 3003

Choose from 11 affordable preferred colours or from many RAL colours



You have many possibilities for the colour design of your new entrance door: You can choose the particularly affordable **matt Traffic white, RAL 9016**, or from 11 **preferred colours** (see left) at an attractive price. Of course, you could also choose from all the other **RAL colours**. Many neon and pearl-effect colours are available on request. This means you will find a door at Hörmann that suits your home perfectly.

Design your door colour exactly as you wish, inside and outside

Exterior and interior white

All Hörmann entrance doors in **standard Traffic white RAL 9016** are matt powder-coated on the inside and outside.

Exterior coloured, interior white

The Hörmann **entrance doors in 11 preferred colours** (see left) are powder-coated in the preferred colour on the exterior and on the inside in Traffic white, matt, RAL 9016 as standard.

Exterior and interior in a colour of your choice

On request you can have your new entrance doors **colour-coated on both sides**; different combinations are also possible, e.g. Ruby red on the exterior and Slate grey on the interior.

Dark colours should be avoided if the aluminium entrance door is exposed to the sun, as a possible deformation of the leaf may impair door function and leaktightness.

Completely under control

With a design tailor-made to your wishes

Individual exterior handles

For all door styles that come equipped with the elegant HOE 500, HOE 600 and HOE 700 stainless steel handles as standard, you can also choose one of the handles mentioned below, depending on what best suits your requirements. For all other door styles, the corresponding handle is permanently integrated and cannot be exchanged.



HOE 500
Brushed matt
stainless steel

HOE 600
Brushed matt
stainless steel

HOE 700
Stainless steel with
decorative centre part

Elegant interior levers

All **ThermoSafe doors** are equipped with Rondo interior levers in stove-enamelled Traffic white, matt, RAL 9016. These are also optionally available in stainless steel or in a RAL colour of your choice. The stainless steel Caro and Okto lever handles are also available on request.

The **ThermoCarbon doors** are equipped with the stainless steel Caro lever handle as standard.



Rondo aluminium lever handle
in Traffic white, matt, RAL 9016



Caro stainless steel lever handle



Okto stainless steel lever handle

Coordinated colour combinations

For all exclusive ThermoCarbon entrance door styles, you can individually coordinate the flush-fitting handle bar and recessed grip with the colour of your entrance door or embellishment.

Optional colour combinations for styles 300, 301, 302, 312



Style 300
In Traffic white, matt, RAL 9016, handle bar in Traffic white, matt, RAL 9016, recessed grip in door colour



Style 300
In preferred colour Slate grey, matt, RAL 7015, handle bar in anodised aluminium, E6 / EV 1, recessed grip in preferred colour White aluminium silk-gloss, RAL 9006



Style 301
In Hörmann colour CH 703, aluminium embellishment in preferred colour Ruby red, RAL 3003, handle bar in preferred colour Ruby red, RAL 3003, and recessed grip in door colour

Optional colour combinations for styles 304, 305, 306, 314



Style 304
In Traffic white, matt, RAL 9016, stainless steel handle, recessed grip in preferred colour White aluminium, silk-gloss, RAL 9006



Style 305
In preferred colour Slate grey, matt, RAL 7015, aluminium embellishment in preferred colour White aluminium, RAL 9006, stainless steel handle, recessed grip in preferred colour White aluminium, silk-gloss, RAL 9006



Style 305
In Hörmann colour CH 703, aluminium embellishment in preferred colour White aluminium, silk-gloss, RAL 9006, stainless steel handle, recessed grip in door colour

Optional colour combinations for style 308



Style 308
In Traffic white, matt, RAL 9016, handle bar in Traffic white, matt, RAL 9016, recessed grip in door colour



Style 308
In preferred colour Slate grey, matt, RAL 7015, handle bar in White aluminium, silk-gloss, RAL 9006, recessed grip in door colour



Style 308
In Hörmann colour CH 703, handle bar and recessed grip in preferred colour Ruby red, matt, RAL 3003

A variety of glazing options

Based on your personal preferences

Individual glazings

Each glass type has a different look depending on colour, structure and finish. In addition to the glass types we suggested in the catalogue images, you may choose from any other glass type according to your own personal preference and wish for your new Hörmann entrance door. You will find an overview of the most popular glass types here. Your specialised Hörmann dealer can provide you with prices and delivery times.



Individual glazings:
e.g. Pave white
ornamental
glass for
entrance
doors, side
elements and
transom lights.



Clear float/matt float



Satinato




Pave white



Parsol grey/matt Parsol grey



Stopsol grey/matt Stopsol grey

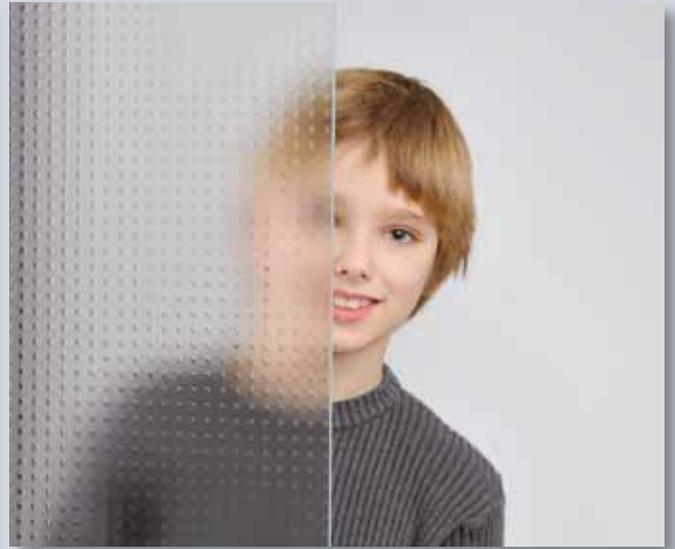

Mastercarré



Chinchilla



Ornament 504



Micrograin



Reflo/matt Reflo

