www.thegaragedoorcentre.co.uk **Technical details**



The highest level of comfort and safety to meet all requirements and wishes.

Flexible installation

The operator head can be turned through 90° to the left or right. It can therefore adapt flexibly to suit all configurations on site and the operator unit lighting can also be used to illuminate specific areas as required.



Flexible installation



Member

The right operator boom for each garage door

With chain or toothed drive-belt system. Maintenance-free and stable. In addition, the toothed drive-belt system works extremely quiet. With the reinforced ball bearing boom, 1.2 mm thick, it is perfect for situations with particularly heavy loading, such as in underground garages with frequent traffic.


Boom	Length	Movement stroke
Short	3080 mm	2475 mm
Medium	3330 mm	2725 mm
Long	4090 mm	3485 mm



	•
Teckentrup UK Limited Units 7,8 & 9, Gemini Trade Park, Europa Boulevard, Warrington WA5 7YF	
Manufacturer & Distributor of Carteck Sectional Garage Doors & Associated Products t: 01925 924050 f: 08701314843 e: sales@teckentrupdepot.co.uk	DHF

e: sales@teckentrupdepot.co.uk w:www.teckentrupdepot.co.uk

w:www.teckentrup.co.uk

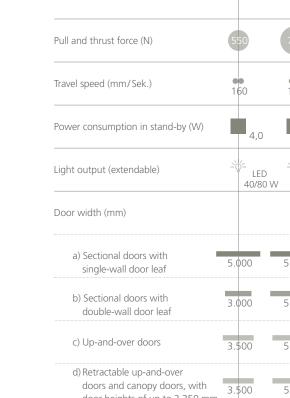

							0800 525442 comfort
Technical data	Comfort	contort 2	Contot 280	Contor ³⁶	comfort.3	Contot 380	Contor 21' realizable contor 2 1' realizable
Pull and thrust force (N)	550	750	1.000	650	850	1.100	450
Travel speed (mm/Sek.)	•• 160	1 60	1 60	22 0	2 35	••• 180	120
Power consumption in stand-by (W)	4,0	4,0	4,0	0,6	0,6	0,6	< 4,0
Light output (extendable)			-`☆- LED 40/80 W		-0- LED W 80/160	LED W 80/160 W	LED 11 W
Door width (mm)							
a) Sectional doors with single-wall door leaf	5.000	5.500	6.000	5.000	5.500	6.000	3.500
b) Sectional doors with double-wall door leaf	3.000	5.500	6.000	3.000	5.500	6.000	2.500
c) Up-and-over doors	3.500	5.000	6.000	3.500	5.000	6.000	3.000
d) Retractable up-and-over doors and canopy doors, with door heights of up to 2.250 m	3.500 m	5.000	6.000	3.500	5.000	6.000	3.000
Door weight (kg)	90	165	200	110	185	220	75
Emergency power (backup battery) (*Can be integrated)	back up 700	back up 700	back up 700	back up 100 ^s	back up 100 ^s	back up 100 *	
Rechargeable battery	—						
Solar							



Sectional doors



Up-and-over doors