

NEW: Roller garage door RollMatic T

Premium quality with compact tubular operator



Details perfectly matched to each other



The roller garage door RollMatic T with its proven technology creates more room in front of and inside the garage. The door curtain is guided via a guide roll and guide channels and impresses with quiet door travel.





A well protected shaft 1

The standard shaft cover practically prevents reaching into the door barrel. In addition, it protects the curtain from damage and dirt when the door is open. For coloured doors, the cover matches the door curtain. With Decograin and Decopaint doors, the cover is supplied in the base colour of the timber design.

Space-saving design 2

The compact door design with tubular operator for door heights up to 2300 mm needs only 290 mm required headroom and a side room of only 75 mm or 105 mm from 3001 mm door width and is also suited to particularly narrow fitting conditions. The side guides with standard backfill cater for quiet door travel and are optimally sealed through the standard brush seal.

Easily fitted

The RollMatic T is quick and easy to fit. The pre-fitted shaft including covering and the predrilled side guides with standard backfill are bolted to the garage walls and lintel.

Emergency operation as standard 3

The RollMatic T can be easily opened from the inside in the case of a power cut by using the standard emergency crank handle. With the optional external emergency operation, you can open your door with a crank handle from the outside. The crank handle is attached in an opening, that is lockable with a locking cylinder. The door can be operated from the inside via the divisible linkage.

Additional fascia panel 4

The additional fascia panel stabilises the fascia panel for fitting in the opening or behind the opening if the fascia panel can be seen in the opening. It harmoniously complements the lintel without any unattractive fitting holes. The additional fascia panel is available in the colour of the door or with a Decograin surface.

Harmonious overall appearance

The exterior of the roller garage door RollMatic T is characterised by its even profiles. For a harmonious door appearance the curtain cover and the side guides are always delivered in the same colour as the door. For Decograin and Decopaint surface finishes the curtain cover and the side guides are always delivered in the basic colour of the timber design.

Decograin surface finish B

The Decograin decors have a convincingly real timber look. A special abrasion-resistant surface protection preserves the UV-resistant plastic film coating on the profiles over a long time.

Decopaint surface finish

The Decopaint decors are an inexpensive alternative to the Decograin surface finishes. The interior and exterior of the profiles are painted to look like timber.

Glazing elements and ventilation grilles

Get more daylight in your garage or improve the ventilation and prevent mould. The glazing elements with synthetic panes or ventilation grilles made of long-lasting plastic are arranged across the entire profile width.



16 colours and 4 decors in timber look



17 Decograin Golden Oak

19 Decograin Rosewood

14 RAL 7015 Slate grey 16 RAL 3004 Purple red 18 Decopaint Golden Oak 20 Decopaint Rosewood



Space saving tubular operator

The high-performance tubular operator is equipped with mechanically adjustable end-of-travel positions. Optionally the operator is available with electronic travel limit safety cut-out. The RollMatic T is supplied with stylish control, over which the operator can be controlled from the inside. The integrated LED lighting provides excellent illumination inside the garage.

Closing edge safety device as standard 2

An optosensor in the bottom seal monitors the closing edge according to DIN EN 13241 and it reliably stops the door when there is an unexpected obstacle. Optionally a wireless closing edge safety device is available without spiral cable 3.

Radio control as standard

Conveniently control your door with the two standard hand transmitters and their tried and tested radio system. Optionally the particularly secure BiSecur radio system with the two hand transmitters HSE 4 BS is available.








Standard radio system with 2 button hand transmitter




Optional BiSecur radio system with 4 button hand transmitter HSE 4 BS

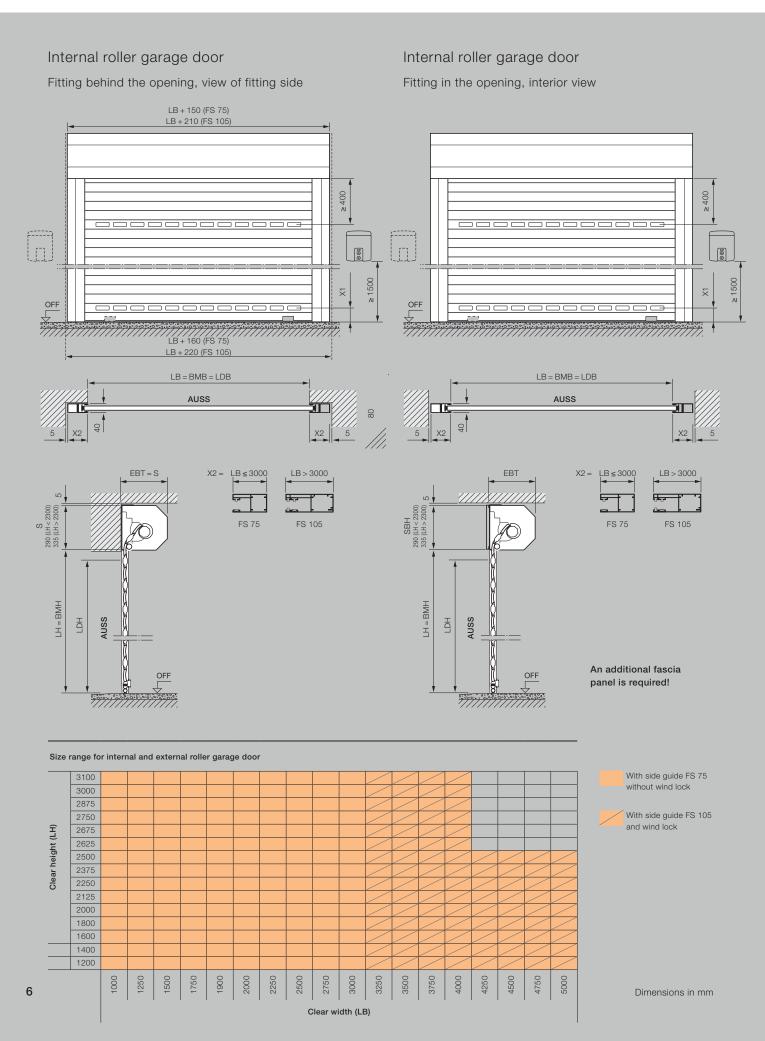


External roller garage door


Fitting in front of the opening, view of fitting side

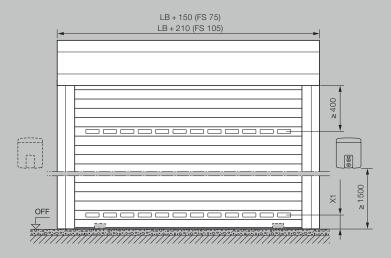





Additional fascia panel

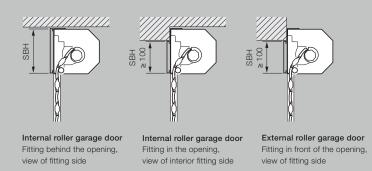

Explanations

DIVID	Ordening size width
BMH	Ordering size height
LB	Clear width
LH	Clear height
LDB	Clear passage width
LDH	Clear passage height
EBT	Fitting depth
S	Required headroom
SBH	Additional fascia panel height
OFF	Finished floor level

OFF Finished floor level

AUSS Exterior

X1 at least 150 mm

X2 LB ≤ 3000 = 75 mm (FS 75)

LB > 3000 = 105 mm (FS 105)

Fitting depth EBT

Up to 2300 mm door height 290 mm From 2301 mm door height 335 mm

Required headroom S / additional fascia panel SBH

Up to 2300 mm door height 290 mm From 2301 mm door height 335 mm

Clear passage height / clear passage width LDH / LDB

Width LB

Required sideroom

Up to door widths of 3000 mm 80 mm

From door widths

of 3001 mm 110 mm


Wind load classes Without wind lock

up to LB = 3000 mm Class 3

With wind lock

Dimensions in mm 7

Hörmann: Quality without Compromise

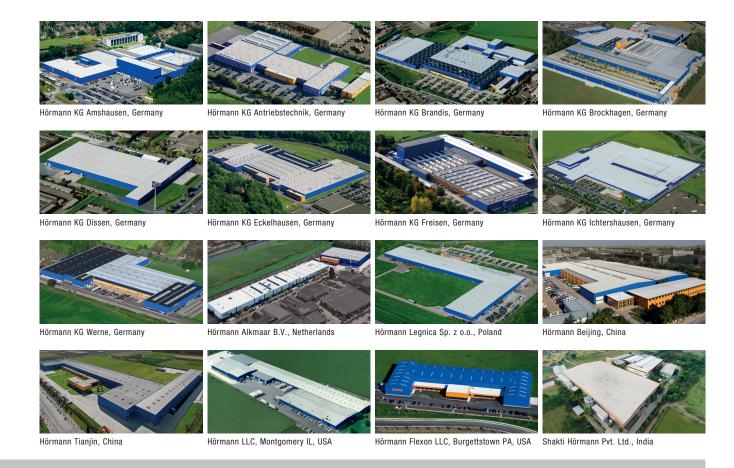

Hörmann is the only manufacturer worldwide that offers you a complete range of all major building products from one source. We manufacture in highly-specialised factories using the latest production technologies. The close-meshed network of sales and service companies throughout Europe, and activities in the USA and Asia, make Hörmann your strong partner for first-class building products, offering "Quality without Compromise".

GARAGE DOORS
OPERATORS
INDUSTRIAL DOORS
LOADING EQUIPMENT
HINGED DOORS
DOOR FRAMES

